



| REV | DESCRIPTION | BY | CHK | DATE | ECN / MPS |
|-----|---------------------|-----|-----|---------|-----------|
| A | ENGINEERING RELEASE | RSI | JGS | 2/12/05 | M63978 |

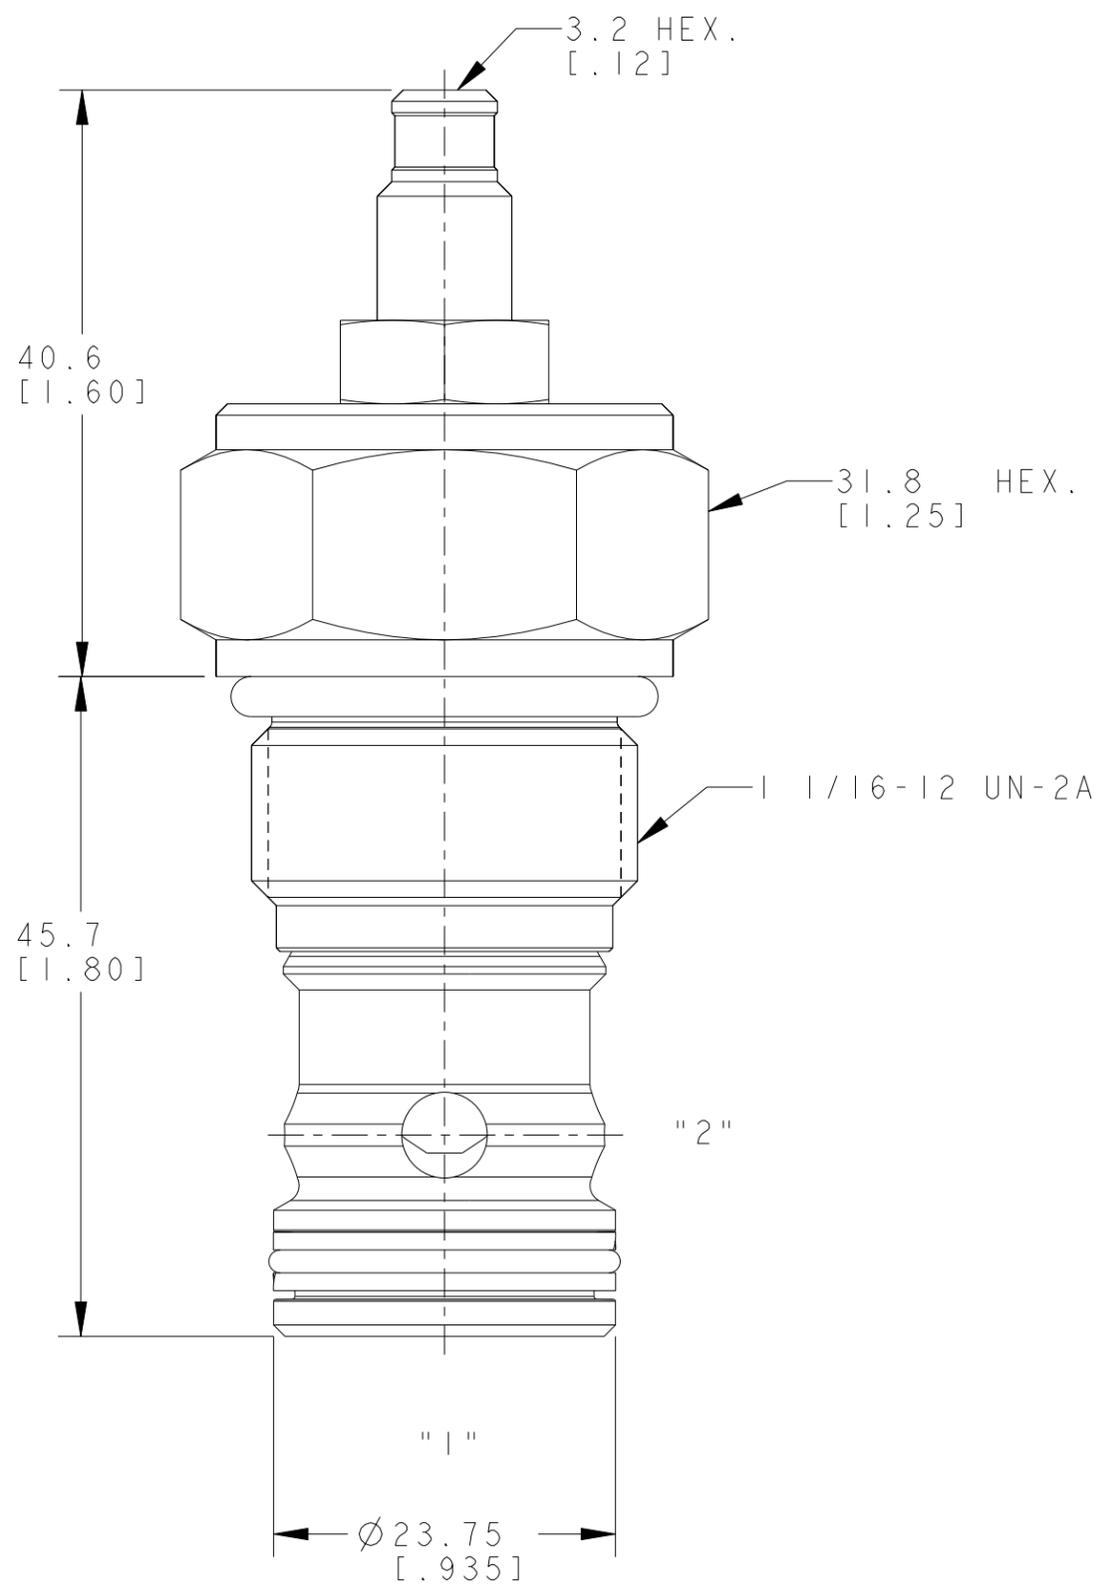

NOTE:
 1. USE VALVE CAVITY C-12-2 OR C-12-2U.
 2. NET WEIGHT OF CARTRIDGE: 0.24 kg [.54 lb]
 3. TORQUE INTO CAVITY:
 ALUMINIUM CAVITY: 81-95 N.m [60-70 lbf.ft]
 STEEL CAVITY : 102-115 N.m [75-85 lbf.ft]

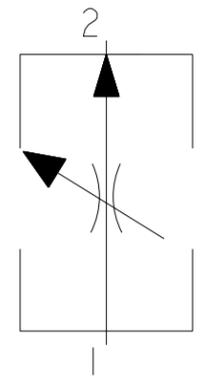

DISTRIBUTION CODE(S)

| | | |
|---|--|----------------------------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS (INCHES) <input checked="" type="checkbox"/> | DRAWING BASED ON ANSI Y14.5M-1982 | |
| | THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016) | |
| TOLERANCES .X ± -- .XX ± -- .XXX ± -- ∠ ± -- | DRAWN PAN BY/DATE 04-22-05 | MATERIAL/HEAT TREAT -- -- |
| UNSPECIFIED RADII ARE: -- | CHECKED RSI BY/DATE 04-25-05 | TITLE FCV11-12-S INSTALLATION |
| UNSPECIFIED DRAFT ANGLES ARE: --° | ENGRG -- BY/DATE -- | NUMBER A-2672-004 |
| B SIZE | THIRD ANGLE PROJECTION DO NOT SCALE | SCALE 2/1 SHEET 1 OF 1 |

