


SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	RAF	3/4/93	23726
B	REVISED	AGJ	5-26-93	22833
C	(1A)ADDED DISTRIBUTION CODE C	CMR	8-19-98	31690
D	(4A)NOTE 2 WAS MOUNTING TYPE: C	AGJ	5-13-02	41044
E	REVISED	VBH	6-23-09	M71199B
F	-1)REVISED AS PER STACK-UP -2)DRAWING UPDATED AS PER ASME Y14.5-2009 STANDARD	JVD	04-10-15	M96311
G	REVISED DRAWING TEMPLATE	SSP	6-26-23	00092757

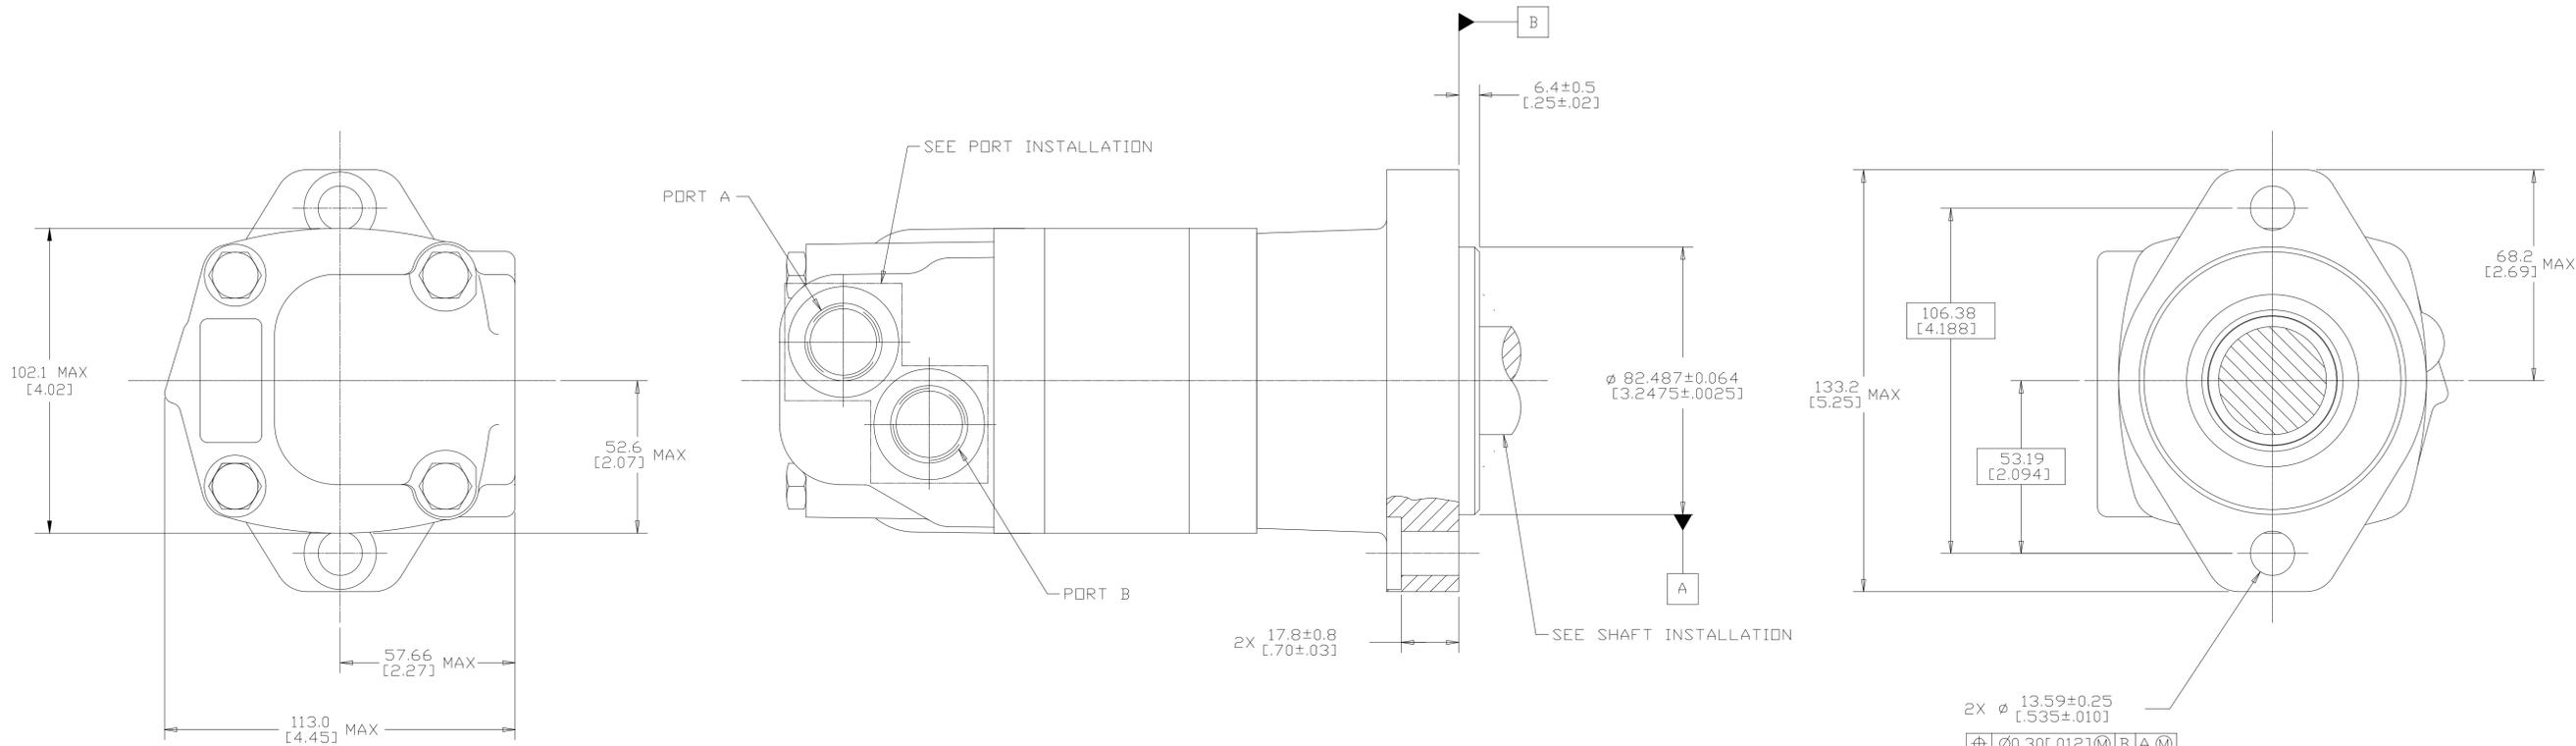

NOTE

1 ROTATION:  
 STANDARD: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;  
 CLOCKWISE WHEN PORT "A" IS PRESSURIZED  
 COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED

REVERSE: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;  
 CLOCKWISE WHEN PORT "B" IS PRESSURIZED  
 COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED

2 MOUNTING TYPE: AC  
 STANDARD, 2 BOLT: Ø 82.6 [3.25] PILOT  
 Ø 13.59 [0.535] HOLES ON Ø 106.4 [4.19]  
 BOLT CIRCLE "SAE A"

REVIEWED FOR CLASSIFICATION PER ESP-042

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN		DRAWING BASED ON ASME Y14.5-2009	
INCHES	<input type="checkbox"/>	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 10016)	
MILLIMETERS	<input checked="" type="checkbox"/>		
TOLERANCES			
.X ± ---		DRAWN	RAF
.XX ± REF		BY/DATE	3-11-93
.XXX ± ONLY		CHECKED	S.RICHARDS
∠ ± ---*		BY/DATE	3-16-93
UNSPECIFIED RADIi ARE:	----	ENGRG	M.BERNSTROM
UNSPECIFIED DRAFT ANGLES ARE:	-----*	BY/DATE	3-17-93
D SIZE	<input type="checkbox"/>	METALLURGY	----
	<input checked="" type="checkbox"/>	BY/DATE	----
	<input type="checkbox"/>	TITLE	
	<input checked="" type="checkbox"/>	2000 SERIES MOTOR INSTALLATION	
	<input type="checkbox"/>	MATERIAL/HEAT TREAT	----
	<input checked="" type="checkbox"/>	NUMBER	A-665-001
	<input type="checkbox"/>	SCALE	1/1
	<input checked="" type="checkbox"/>	SHEET	1 OF 1