
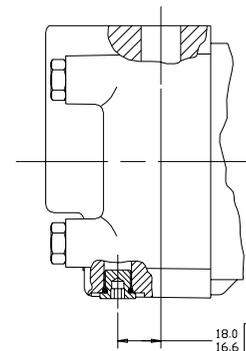
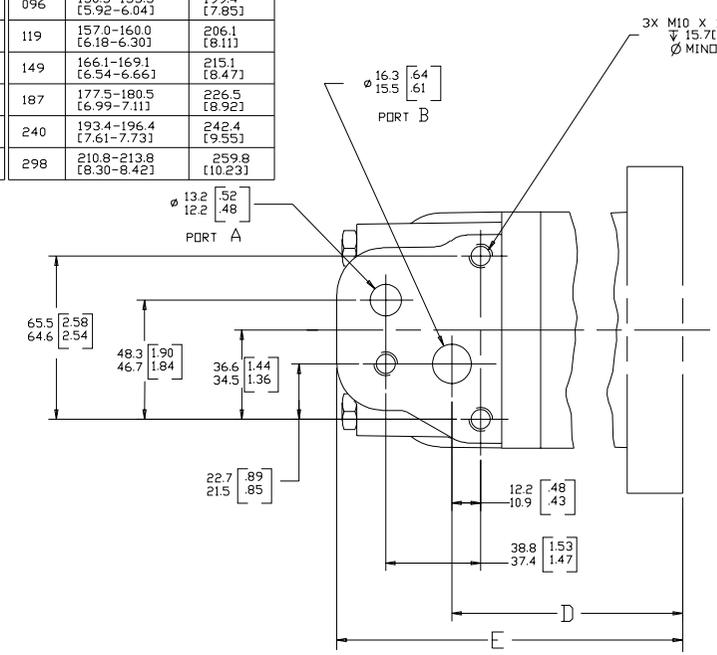


8			7			6			5			4			3			2			1		
MOUNTING TYPE AB,AM,AP,AR,AV,BB,BF,BG,BH			MOUNTING TYPE AC,AF,AH,AN,AS,AW,AU,AY,BA,BE,BD			MOUNTING TYPE AD,AE,BJ			MOUNTING TYPE AJ & BC			REV			DESCRIPTION			BY	CHK	DATE	ECN		
DISP	D	E MAX	DISP	D	E MAX	DISP	D	E MAX	DISP	D	E MAX	DISP	D	E MAX									
			021	125.5-128.0 [4.94-5.04]	173.9 [6.85]										A	ENGINEERING RELEASE	RAF	05/11/93	M10742				
			X025	127.0-129.5 [5.00-5.10]	175.4 [6.91]										K	REVISED	RPD	CSG	29/03/10	M78773			
			040	132.6-135.1 [5.22-5.32]	181.1 [7.13]										L	-1X(7C)ADDED MOUNTING TYPE 'BM' TO TAB	RPD	HRK	06/01/10	M79248			
049	95.6-98.0 [3.76-3.86]	144.1 [5.67]	049	135.7-138.2 [5.34-5.44]	184.2 [7.25]	049	77.3-80.5 [3.04-3.17]	126.6 [4.98]	049	139.2-142.2 [5.48-5.60]	188.3 [7.41]	049	139.2-142.2 [5.48-5.60]	188.3 [7.41]	M	-1X(7D)ADDED DISPLACEMENT CODES X021,X025 AND X040 -2X(6C) REVISED PICTORIALY (REMOVED RIVETS) -3X(2C)..... ∇ 15.7 [6.2] MIN..... WAS ∇ D 15.7 [6.2] MIN.....	CSG	VBH	06/27/15	M96902			
055	97.9-100.4 [3.85-3.95]	146.4 [5.76]	055	138.0-140.5 [5.43-5.53]	186.5 [7.34]	055	79.6-82.8 [3.13-3.26]	128.9 [5.07]	055	141.6-144.6 [5.57-5.69]	190.6 [7.50]	055	141.6-144.6 [5.57-5.69]	190.6 [7.50]	N	(8B)ADDED MOUNTING TYPE *AL*	SMT	SB	01/16/17	M103108			
062	100.2-102.7 [3.95-4.03]	148.7 [5.86]	062	140.3-142.8 [5.53-5.62]	189.0 [7.44]	062	81.9-85.2 [3.23-3.35]	131.2 [5.17]	062	143.9-146.9 [5.67-5.78]	192.9 [7.60]	062	143.9-146.9 [5.67-5.78]	192.9 [7.60]	P	(8D) UPDATED DISPLACEMENT CODES 021 AND 040 WAS X021 AND 040	PJ	PJ	07/13/17	M105018			
080	106.6-109.1 [4.20-4.30]	155.2 [6.11]	080	146.8-149.3 [5.78-5.88]	195.3 [7.69]	080	88.3-91.6 [3.48-3.61]	137.6 [5.42]	080	150.3-153.3 [5.92-6.04]	199.4 [7.85]	080	150.3-153.3 [5.92-6.04]	199.4 [7.85]									
096	106.6-109.1 [4.20-4.30]	155.2 [6.11]	096	146.8-149.3 [5.78-5.88]	195.3 [7.69]	096	88.3-91.6 [3.48-3.61]	137.6 [5.42]	096	150.3-153.3 [5.92-6.04]	199.4 [7.85]	096	150.3-153.3 [5.92-6.04]	199.4 [7.85]									
119	113.4-115.8 [4.46-4.56]	161.9 [6.37]	119	153.5-156.0 [6.04-6.14]	202.0 [7.95]	119	95.1-98.3 [3.74-3.87]	144.4 [5.68]	119	157.0-160.0 [6.18-6.30]	206.1 [8.11]	119	157.0-160.0 [6.18-6.30]	206.1 [8.11]									
149	122.4-124.9 [4.82-4.92]	170.9 [6.73]	149	162.5-165.0 [6.40-6.50]	211.1 [8.31]	149	104.1-107.4 [4.10-4.23]	153.4 [6.04]	149	166.1-169.1 [6.54-6.66]	215.1 [8.47]	149	166.1-169.1 [6.54-6.66]	215.1 [8.47]									
187	133.8-136.3 [5.27-5.37]	182.3 [7.18]	187	173.9-176.4 [6.85-6.95]	222.5 [8.76]	187	115.5-118.7 [4.55-4.68]	164.8 [6.49]	187	177.5-180.5 [6.99-7.11]	226.5 [8.92]	187	177.5-180.5 [6.99-7.11]	226.5 [8.92]									
240	149.7-152.2 [5.89-5.99]	198.2 [7.81]	240	189.8-192.3 [7.47-7.57]	238.4 [9.39]	240	131.4-134.7 [5.17-5.30]	180.7 [7.12]	240	193.4-196.4 [7.61-7.73]	242.4 [9.55]	240	193.4-196.4 [7.61-7.73]	242.4 [9.55]									
298	167.1-169.6 [6.58-6.68]	215.6 [8.49]	298	207.2-209.7 [8.16-8.26]	255.8 [10.07]	298	148.8-152.1 [5.86-5.99]	198.1 [7.80]	298	210.8-213.8 [8.30-8.42]	259.8 [10.23]	298	210.8-213.8 [8.30-8.42]	259.8 [10.23]									
MOUNTING TYPE 00			MOUNTING TYPE BM			MOUNTING TYPE AL (N)																	
DISP	D	E MAX	DISP	D	E MAX	DISP	C	E MAX															
049	73.5-75.4 [2.89-2.97]	121.5 [4.78]	049	68.5-70.5 [2.70-2.78]	116.0 [4.57]	049	98.0-99.6 [3.86-3.92]	146.1 [5.75]															
055	75.8-77.7 [2.98-3.06]	123.8 [4.87]	055	70.8-72.8 [2.79-2.87]	118.8 [4.68]	055	100.3-101.9 [3.95-4.01]	148.4 [5.84]															
062	78.1-80.1 [3.08-3.15]	126.1 [4.97]	062	73.1-75.2 [2.88-2.96]	121.2 [4.77]	062	102.6-104.2 [4.04-4.10]	150.9 [5.94]															
080	84.5-86.5 [3.33-3.41]	132.6 [5.22]	080	79.5-81.6 [3.13-3.21]	127.6 [5.02]	080	109.0-110.7 [4.29-4.36]	157.2 [6.19]															
096	84.5-86.5 [3.33-3.41]	132.6 [5.22]	096	79.5-81.6 [3.13-3.21]	127.6 [5.02]	096	109.0-110.7 [4.29-4.36]	157.2 [6.19]															
119	91.3-93.2 [3.59-3.67]	139.3 [5.48]	119	86.3-88.3 [3.40-3.48]	134.3 [5.29]	119	115.8-117.4 [4.56-4.62]	163.9 [6.45]															
149	100.3-102.3 [3.95-4.03]	148.3 [5.84]	149	95.3-97.4 [3.75-3.83]	143.4 [5.65]	149	124.8-126.4 [4.91-4.98]	173.0 [6.81]															
187	111.7-113.7 [4.40-4.48]	159.7 [6.29]	187	106.7-108.8 [4.20-4.28]	154.8 [6.09]	187	136.2-137.8 [5.36-5.43]	184.4 [7.26]															
240	127.6-129.6 [5.02-5.10]	175.6 [6.92]	240	122.6-124.7 [4.83-4.91]	170.7 [6.72]	240	152.1-153.8 [5.99-6.05]	200.3 [7.89]															
298	145.3-146.7 [5.71-5.79]	193.0 [7.60]	298	140.0-142.1 [5.51-5.59]	188.1 [7.41]	298	169.5-171.2 [6.67-6.74]	217.7 [8.57]															

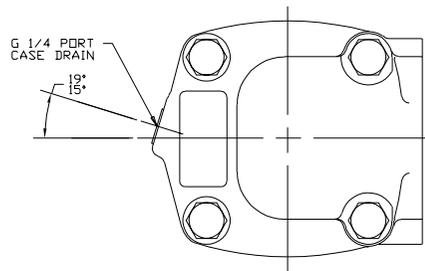

NOTE

- 1 PORT OPTION: AE
- 2 CASE FLOW OPTION: 02

REVIEWED FOR CLASSIFICATION PER ESP-042

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	<input type="checkbox"/> MILLIMETERS	DRAWING BASED ON ANSI Y14.5M-1982	
TOLERANCES		MATERIAL/HEAT TREAT	
XX ± REF	XXX ± DNL Y	DRWN BY DATE	CHKD BY DATE
UNSPECIFIED RADI ARE	UNSPECIFIED DRAFT ANGLES ARE	ENGR. BY DATE	METALLURGY BY DATE
DRAWING FORMAT CASE <input type="checkbox"/> MANUAL <input type="checkbox"/>	<input type="checkbox"/> THIRD ANGLE PROJECTION	TITLE	
DO NOT SCALE		2000 SERIES MOTOR PORT INSTALLATION	
ARITHMETICAL AVERAGE		NUMBER	
SCALE 1/1		A-673-007	
SHEET 1 OF 1			

