


SYM	REVISION B	DATE	ECN
\triangle	ENGINEERING RELEASE AG	3-8-94	M11397
В	71.4/69.0 [2.81/2.72] WAS 71.6/69.0 [2.82/2.72]	5-17-04	47918
C	-I)MOUNTING TYPE WAS VJVV -2)OUTPUT SHAFT WAS VI6V	D 1-24-07	0002527

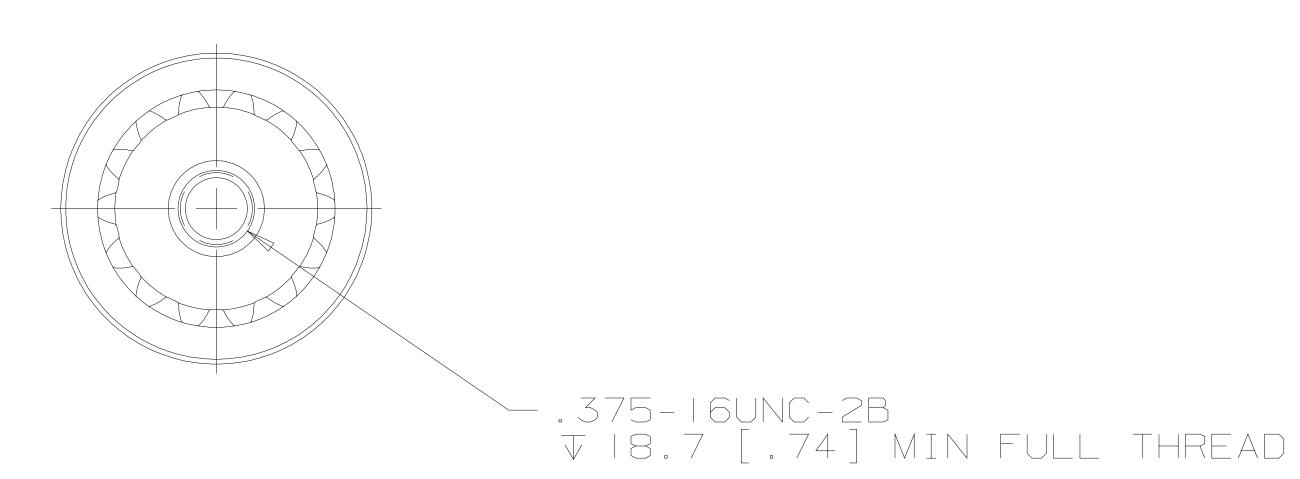

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN DRAWING BASED ON ANSI Y14.5M-1982 INCHES THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS MILLIMETERS [INCHES] THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR TOLERANCES DESIGN. (PER ISO 16016) . X ± - - - -. XX ± ₹ ₹ ₹ drawn A. JOHNSON MATERIAL/HEAT TREAT BY/DATE 3-23-94 CHECKED SDR 3-23-94 _ ----ENGRG BY/DATE MLB 3-30-94 UNSPECIFIED 4000 SERIES MOTOR RADII ARE METALLURGY _ _ _ _ _ _ _ _ By/date SHAFT INSTALLATION MICROINCHES X
MICROMETERS
[MICROINCHES] NUMBER UNSPECIFIED DRAFT ANGLES ARE THIRD ANGLE PROJECTION DRAWING FORMAT cadd 🛛 manual 🗌 DO NOT SCALE SCALE |/| SHEET | OF ARITHMETICAL AVERAGE