REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	SMM		03-05-02	M27371A
B	REVISED PICTORIALLY	SMM		03-12-02	M27371B
C	(7A)MOUNTING TYPE WAS "D"	SSD		1-24-07	0002527

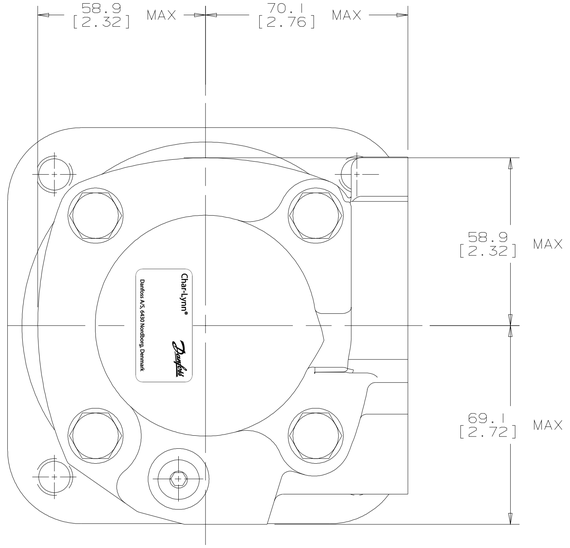

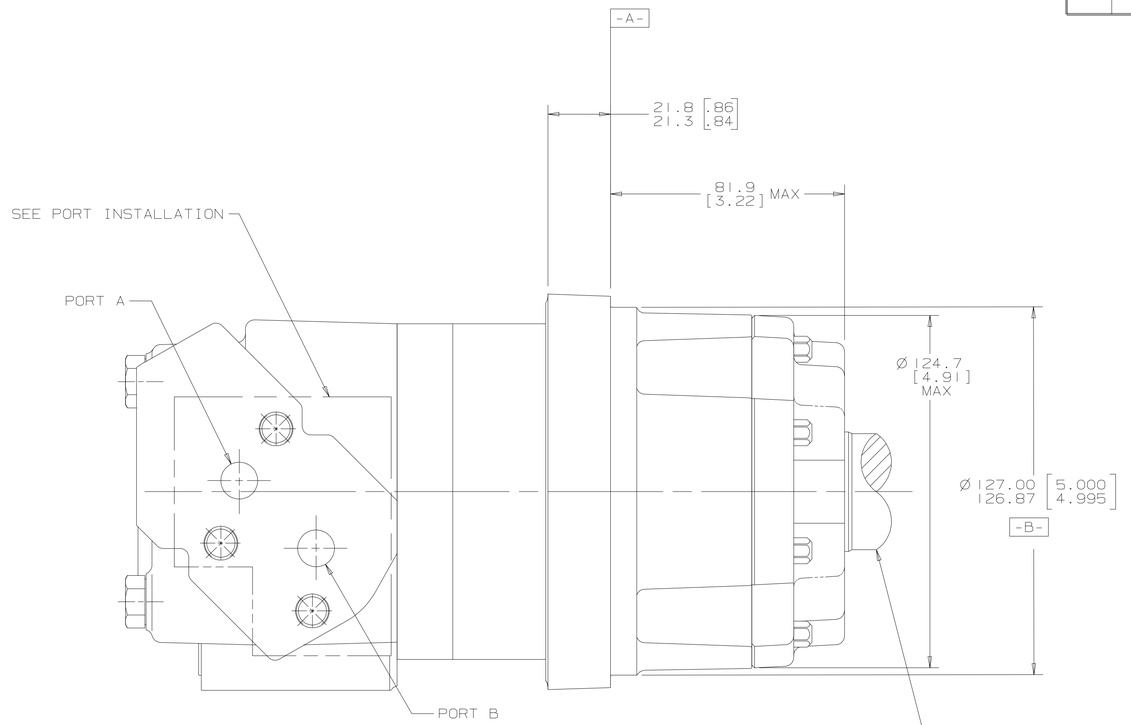

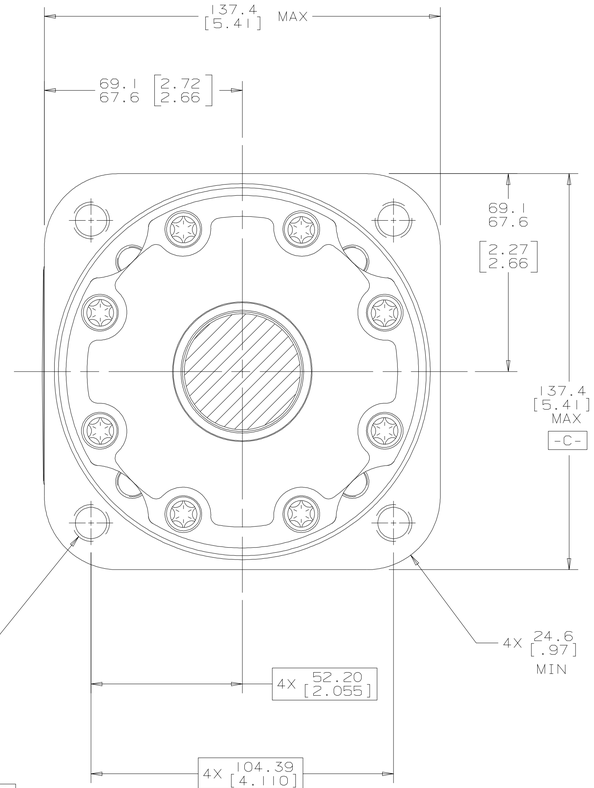

⌖	Ø1.5 [.06] Ⓜ	A	B Ⓜ	C	
⌖	Ø0.76 [.030] Ⓜ	A			

NOTE

1 ROTATION:
STANDARD; WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
CLOCKWISE WHEN PORT "A" IS PRESSURIZED
COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED

REVERSE; WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
CLOCKWISE WHEN PORT "B" IS PRESSURIZED.
COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED

2 MOUNTING TYPE: AD
WHEEL, 4 BOLT: 127.00 [5.000] PILOT DIA.
.500-13 UNC-2B THREADED HOLES ON 147.62
[5.812] DIA. BOLT CIRCLE.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN
INCHES ☐
MILLIMETERS [INCHES] ☒
TOLERANCES
.X ± - - - -
.XX ± REF
.XXX ± ONLY
∠ ± - - - -
UNSPECIFIED RADII ARE - - -
UNSPECIFIED DRAFT ANGLES ARE - - -
DRAWING FORMAT CADD ☒ MANUAL ☐

DRAWING BASED ON ANSI Y14.5M-1982

THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)

DRAWN BY/DATE SMM 03-07-02
CHECKED BY/DATE AGJ 03-08-02
ENGRG BY/DATE RTH 03-08-02
METALLURGY BY/DATE - - - -
THIRD ANGLE PROJECTION
DO NOT SCALE

MATERIAL/HEAT TREAT

TITLE
4000 MOTOR INSTALLATION

MICRO INCHES ☒ MICROMETERS [MICRO INCHES] ☐
250 ARITHMETICAL AVERAGE

NUMBER
A-600-002

SCALE 1/1 SHEET 1 OF 1