


PART NUMBER	DN	I.D. (REF) mm [in]	O.D. (REF) mm [in]	OPERATING PRESSURE bar [psi]	PROOF PRESSURE bar [psi]	MIN. BURST PRESSURE bar [psi]	MIN. BEND RADIUS mm [in]	WEIGHT kg/m [lbs/ft]
2651-4	5	4.8 [.19]	13.2 [.52]	207 [3000]	414 [6000]	828 [12000]	76 [3.00]	0.24 [.16]
2651-5	6	6.4 [.25]	14.8 [.58]	207 [3000]	414 [6000]	828 [12000]	86 [3.38]	0.25 [.17]
2651-6	8	7.9 [.31]	17.3 [.68]	155 [2250]	310 [4500]	620 [9000]	102 [4.00]	0.36 [.24]
2651-8	10	10.3 [.41]	19.0 [.75]	138 [2000]	276 [4025]	552 [8000]	117 [4.62]	0.40 [.27]
2651-10	12	12.7 [.50]	23.4 [.92]	120 [1750]	240 [3500]	480 [7000]	140 [5.50]	0.57 [.38]
2651-12	16	15.9 [.62]	27.4 [1.08]	103 [1500]	206 [2985]	412 [6000]	165 [6.50]	0.70 [.47]
2651-16	22	22.2 [.88]	31.6 [1.25]	55 [800]	110 [1600]	220 [3200]	187 [7.38]	0.65 [.44]
2651-20	28	28.6 [1.12]	38.1 [1.50]	43 [625]	86 [1250]	172 [2500]	229 [9.00]	0.85 [.57]
2651-24	35	34.9 [1.38]	44.5 [1.75]	35 [500]	70 [1000]	140 [2000]	267 [10.50]	1.01 [.68]
2651-32	46	46.0 [1.81]	56.4 [2.22]	24 [350]	48 [700]	96 [1400]	337 [13.25]	1.31 [.88]
2651-40	60	60.3 [2.38]	73.2 [2.88]	24 [350]	48 [700]	96 [1400]	610 [24.00]	2.23 [1.50]

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
BR	REDRAWN. UPDATED TO DANFOSS FORMAT. 1) UPDATED NOTE #4 FOR LAYLINE IDENTIFICATION. 2) UPDATED O.D. VALUES FROM MAX. TO REF. FOR ALL SIZES. 3) UPDATED "TITLE" AND "SUBTITLES" 4) ADDED NOTE #6.	2023-02-23 DDK/TMH	CO-0226657

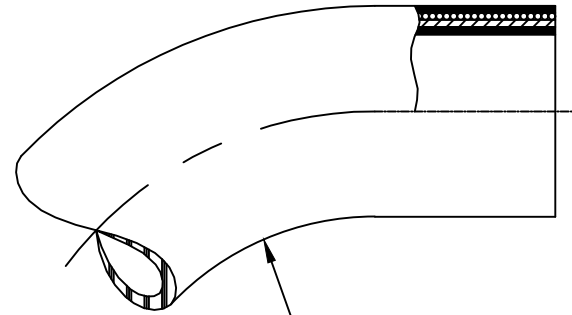

METRIC

- 6. MSHA CODE IS PLANT SPECIFIC: BR 2
 USE MSHA IC-84/11 FOR MOUNTAIN HOME PLANT.
 USE MSHA IC-84/19 FOR NEWBERN PLANT.
 USE MSHA IC-84/55 FOR ÇERKEZKÖY PLANT.
- 5. TEMPERATURE RANGE: -40°C TO +100°C [-40°F TO +212°F], AIR NOT TO EXCEED +71°C [+160°F] AND 250 PSI
- 4. EXAMPLE OF LAYLINE IDENTIFICATION FOR -6 SIZE: BR 4 6
 1st LINE: EMBOSSED
 "Aeroquip by Danfoss 2651-6 7.9 MM (0.31 IN) DN8 MSHA IC-84/11 155 BAR (2250 PSI) -40°C to +100°C"
 2nd LINE: INK JET FOR MOUNTAIN HOME & ÇERKEZKÖY PLANT:
 "2651-6 ABS USCG DNV YYYY-MM-DD Made in USA /-/- LOT CODE"
 2nd LINE: INK WHEEL FOR NEWBERN:
 "2651-24 ABS USCG DNV YYYY-MM-DD MADE IN USA -/-// LOT CODE"
- 3. APPLICATION: HYDRAULICS, GASOLINE, FUEL AND LUBRICATING OILS, AIR AND WATER.
- 2. CONSTRUCTION: NITRILE RUBBER INNER TUBE, POLYESTER INNER BRAID, SINGLE WIRE BRAID REINFORCEMENT, AND CHLOROPRENE RUBBER COVER.
- 1. ALL HOSE ATTRIBUTES ARE METRIC [INCH].

FLUID CONVEYANCE DIVISION MAUMEE, OHIO U.S.A.		DRAWN D. KUMBHAR	
		CHECKED T. HIRVE	
		APPROVED P. DEWITT	
		RELEASE DATE 2023-02-23	
		DRAWING INTERPRETATION PER ES 10	
		DRAWING TITLE	
		AEROQUIP HOSE BR 3	
		TEXTILE & WIRE REINFORCEMENT, RUBBER COVER	
CO-0226657	CAGE CODE 01276	DRAWING NUMBER	REV
THIRD ANGLE PROJECTION	DIST U	2651	BR
	SIZE A3		
	SCALE NONE		
	SHEET 1		
<small>THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. (PER ISO 16016)</small>			